


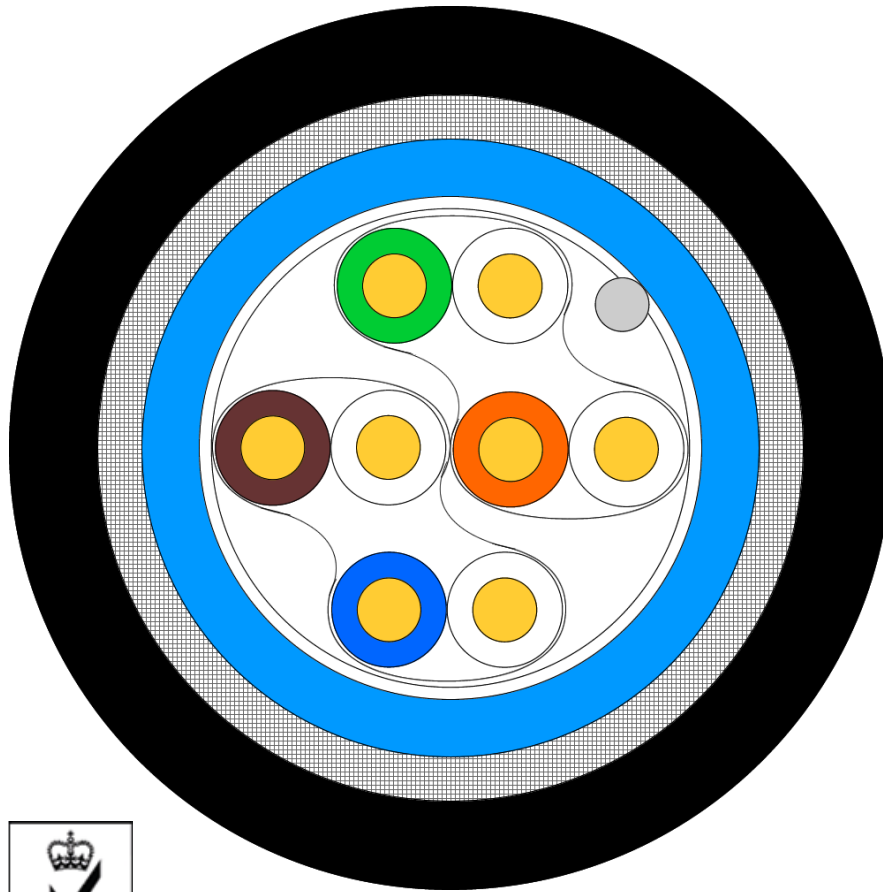

CABLE DESCRIPTION –

**Steel Wire Braid Protected
Cat6A F/FTP LSZH**

DESIGN -	NOMINAL DIAM. (mm)
Bare Copper Wire (23AWG) Conductor	0.56
Foamskin Polyethylene Insulation	1.35
2 Cores Paired Up	
2 Pairs Screened	
High Performance FTP: Al-Laminated Plastic Foil, Draka Patented Wrapping of 2 Pairs	
2x2 Screened Pairs Laid Up & Screened	
Advanced Screen: Al-Laminated Plastic Foil	
Drain Wire 26AWG Tinned	
LSZH Blue RAL 5024 Inner Sheath	7.00
Galvanised Steel Wire Braided	8.00
LSZH Outer Sheath	10.60
Flame Retardant to IEC 60332-3-22	
Standards: EN 50173-1, EN 50288-5-1, ISO/IEC 11801, IEC 61156-5, TIA/EIA-568-B.2	