


UC400 Cat.6 U/UTP Dca HD LSHF

U/UTP Installation cable

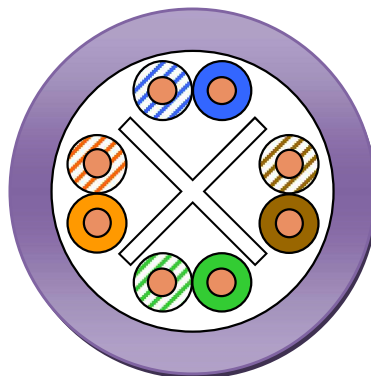

Application

Primary (Campus), Secondary (Riser), Tertiary (Horizontal)

IEEE 802.3: 10Base-T; 100Base-T; 1000Base-T;

IEEE 802.5 16 MB; ISDN; TPDDI; ATM

Standards

EIA/TIA-568-C.2

ISO/IEC 11801 2nd ed; IEC 61156-5

EN 50173-1, EN 50288-6-1

Flame resistance

EN 50399: Class D_{ca}, s2, d2, a1; Class E_{ca}

LSHF: IEC 60332-1; IEC 60754-2; IEC 61034

Construction

Conductor	Bare copper wire: Nom. 0,54 mm
Insulation	Polyethylene, Ø 0.95 mm nom
Twisting	2 cores to the pair
Cable lay up	4 pairs to the core non-metallic cross separator (spline)
Sheath	LSHF, Violet RAL 4001

Mechanical properties

Minimum bending radius	Installation	8 x D
	Installed	4 x D
Temperature range	during operation	-20°C up to + 60°C
	during installation	0°C up to + 50°C

UC400 Cat.6 U/UTP Dca HD LSHF

Electrical properties

at 20°C

DC loop resistance	≤ 176 Ω /km
Resistance unbalance	≤ 2%
Insulation resistance (500 V)	≥ 5000 MΩ *km
Capacitance at 800 Hz	Nom. 48 nF/km
Capacitance unbalance (pair to ground)	≤ 1500 pF/km
Mean impedance 100 MHz	100 ± 5 Ω
Nominal velocity of propagation	Approx. 67 %
Propagation delay	Nominal 535 ns/100m
Delay skew	Nominal 20 ns/100m
Test voltage (DC, 1 min)	1000 V
Core/Core	

Electrical data (nominal)

acc. to Cat.6 (at 20°C)

f	Attenuation		NEXT		PS-NEXT		ACR		PS-ACR		ELFEXT		PS-ELFEXT		Return loss
(MHz)	(dB/100m)		(dB)		(dB)		(dB/100m)		(dB/100m)		(dB/100m)		(dB/100m)		(dB)
	max.	Nom.	min	nom.	min.	Nom.	Min.	Nom.	Min.	Nom.	min.	Nom.	min.	Nom.	min.
1	2.1	1.9	74	78	72	75	72.0	76.1	70.0	73.1	68	82	65	80	20
4	3.8	3.8	65	69	63	66	61.2	65.2	59.2	62.2	56	70	53	68	23
10	6.0	6.0	59	63	57	60	53.0	57.0	51.0	54.0	48	62	45	60	25
16	7.6	7.6	56	60	54	57	48.4	52.3	46.4	49.3	44	58	41	56	25
20	8.5	8.5	55	59	53	56	46.5	50.0	44.5	47.0	42	56	39	54	25
31.2	10.7	10.7	52	56	50	53	41.3	45.0	39.3	42.0	38	52	35	50	23.6
62.5	15.5	15.1	47	51	45	48	31.5	36.0	29.5	33.0	32	46	29	44	21.5
100	19.9	19.1	44	48	42	45	24.1	28.9	22.1	25.9	28	42	25	40	20.1
125	22.5	21.3	43	47	41	44	20.5	25.2	18.5	22.2	26	40	23	38	19.5
155.5	25.4	23.8	42	45	40	42	16.6	21.3	14.6	18.3	24	38	21	36	18.8
175	27.1	25.3	41	44	39	41	13.9	19.1	11.9	16.1	23	37	20	35	18.4
200	29.2	27.0	40	44	38	41	10.8	16.5	8.8	13.5	22	36	19	34	18.0
250	33.0	32.0	38	42	36	39	5.0	10.0	2.0	7.0	20	34	17	32	17.3
300		36.1		41		38		4.8		1.8		32		30	
400		41.7		39		36		-2.7		-5.7		30		28	

Technical data

Product code	Product name	Outer diameter	Fire load		Weight	Tensile force
		mm	MJ/km	kWh/m	kg/km	N
60062605	UC400 Cat.6 U/UTP Dca HD 4P LSHF (violet) 305BR	5.3	316	0.087	36	100

[PRODUCT CODE TABLE]

UC400 Cat.6 U/UTP Dca HD LSHF

Print Legend

DRAKA - UC400 CATEGORY 6 U/UTP HD 4P Dca IEC 61156-5 LSHF <Batchno> <metermark>

© PRYSMIAN GROUP 2012, All Rights Reserved

All sizes and values without tolerances are reference values. Specifications are for product as supplied by Prysmian Group: any modification or alteration afterwards of product may give different result.

The information contained within this document must not be copied, reprinted or reproduced in any form, either wholly or in part, without the written consent of Prysmian Group. The information is believed to be correct at the time of issue. Prysmian Group reserves the right to amend this specification without prior notice. This specification is not contractually valid unless specifically authorised by Prysmian Group.