



TOXFREE MARINE XOxTCuZ1-K (AS) (x:1...3)

The Marine armoured instrumentation cable

IEC 60092-376, IEC 60092-350

DESIGN

1. Conductor

Electrolytic copper, class 5 (flexible), based on EN 60228.

2. Insulation

LSZH XLPE 90°C.

The standard identification is the following per pair:

1x Blue

1x White

Each pair is numbered

3. Screen

Individual and/or collective aluminium / polyester tape with tinned copper drain wire

O1.....Individual screen (per pair)

O2.....Overall screen (per cable)

O3.....Individual and overall screen

4. Armour Bedding

Polyester tape.

5. Armour


Tinned copper braid screen.


6. Outer sheath

LSZH polyolefin outer sheath SHF1 type. Grey colour, fire retardant.

APPLICATIONS

The Toxfree Marine XOxTCuZ1-K (AS) cable with zero halogens is a safety armoured instrumentation cable. In case of fire, it does not emit toxic or corrosive gases, thereby protecting public health and avoiding any possible damage to electronic equipment. For this reason, its use is recommended in marine applications.

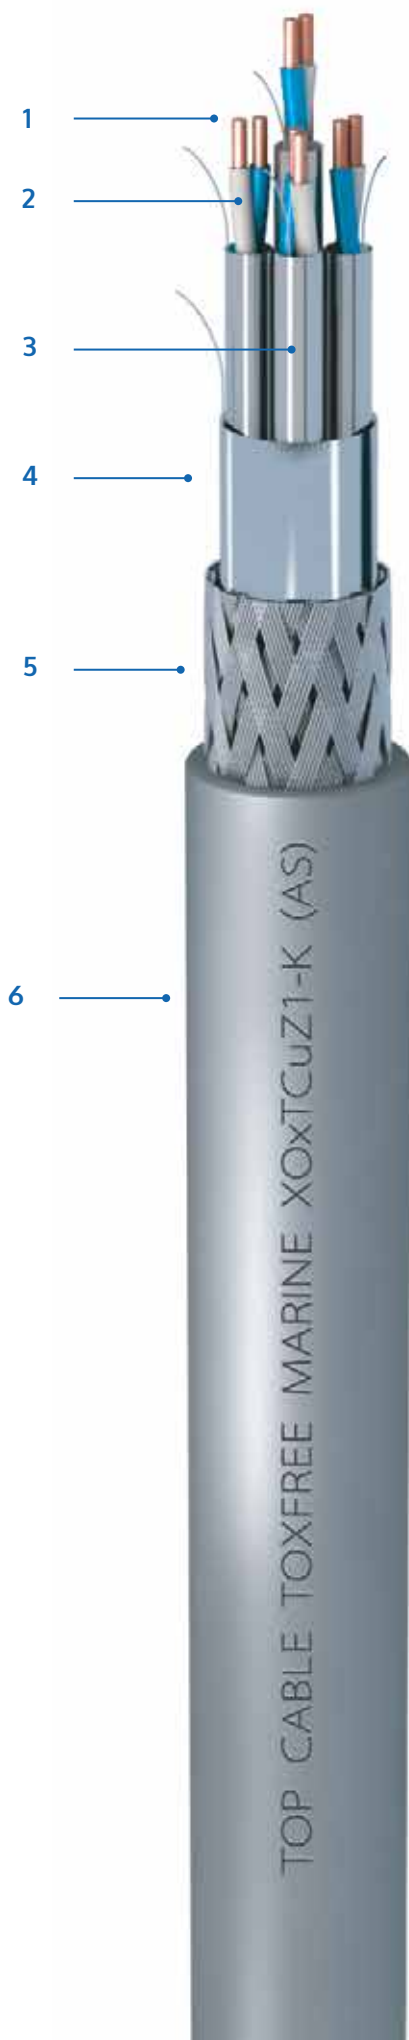

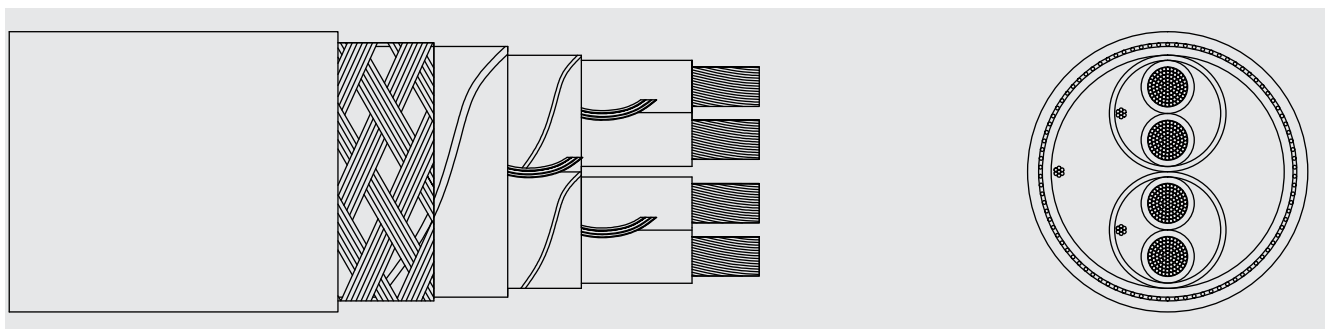

CHARACTERISTICS



Electrical performance

INSTRUMENTATION 250V



Standards

IEC 60092-376, IEC 60092-350



Approvals

DNV-GL
ABS (in progress)
Bureau Veritas (in progress)
CE
RoHS



Thermal performance

Maximum service temperature: 90°C.
Maximum short-circuit temperature: 250°C (max. 5 s).
Minimum service temperature: -40°C (fixed installations).



Fire performance

Flame non-propagation based on EN 60332-1 and IEC 60332-1.
Fire non-propagation based on EN 60332-3-22 and IEC 60332-3-22.
LSZH (Low Smoke Zero Halogen) based on EN 60754-1 and IEC 60754-1.
Low smoke emission based on EN 61034 and IEC 61034.: Light transmittance > 60%
Low corrosive gases emission based on EN 60754-2 and IEC 60754-2.



Mechanical performance

Minimum bending radius: x5 cable diameter.
Impact resistance: AG3 High severity.



Chemical performance

Chemical & Oil resistance: Acceptable.



Water performance

Water resistance: AD6 waves.



Other

Metre by metre marking.



Installation conditions

Open Air.
In conduit.
Wall attached.
On tray.



Applications

Marine use.
Public places.





DIMENSIONS XO2TCuZ1-K

Cross section (mm ²)	Diameter (mm)	Weight (Kg/Km)	Open Air 45°C (A)	Max. Conductor Resistance at 20°C (Ohm/Km)
1 x 2 x 0,75	7,2	90	17,1	27,6
2 x 2 x 0,75	11,3	150	13,7	27,6
4 x 2 x 0,75	13,1	215	11,2	27,6
7 x 2 x 0,75	15,9	340	9,2	27,6
10 x 2 x 0,75	20,2	470	8,6	27,6
14 x 2 x 0,75	21,9	605	7,4	27,6
19 x 2 x 0,75	24,4	795	6,5	27,6
24 x 2 x 0,75	28,8	960	6,5	27,6

DIMENSIONS XO3TCuZ1-K

Cross section (mm ²)	Diameter (mm)	Weight (Kg/Km)	Open Air 45°C (A)	Max. Conductor Resistance at 20°C (Ohm/Km)
1 x 2 x 0,75	7,1	135	17,1	27,6
2 x 2 x 0,75	11,4	185	13,7	27,6
4 x 2 x 0,75	13,2	265	11,2	27,6
7 x 2 x 0,75	16,0	390	9,2	27,6
10 x 2 x 0,75	20,3	510	8,6	27,6
14 x 2 x 0,75	22,1	655	7,4	27,6
19 x 2 x 0,75	24,6	865	6,5	27,6
24 x 2 x 0,75	29,1	1.045	6,5	27,6

Maximum admissible intensities according to IEC 60364-5-52.

For other installation conditions, please refer to correction factors in the appendix to this catalogue.

See more technical data on the particular cable specification.

Top Cable reserves the right to carry out any modification to the data sheets whatsoever without giving previous notice.

For more information: sales@topcable.com