


OFFSHORE CABLES

P15 UX

NEK TS 606

Mud Resistance, Halogen Free, Flame Retardant, Low Smoke

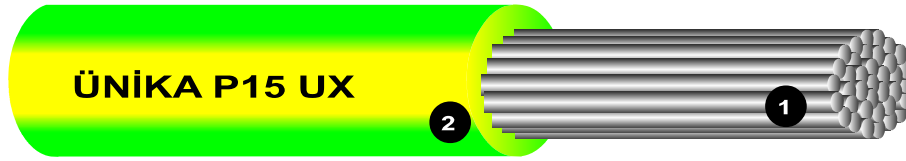

MAKE UP

1. Conductor : Tinned stranded copper in accordance with IEC 60228 CI 2
2. Insulation : Halogen free SHF MUD compound in accordance with NEK TS 606 & IEC 61892-4

Max. Operating Temperature : 90 °C
Max. Installation Temperature : -15 °C
Max. Storage Temperature : -40 °C
Rated Voltage : 0,6/1 kV

Design Guidelines : NEK TS 606
Halogen Free Properties : IEC 60754-1 & IEC 60754-2
Low Smoke Emission : IEC 61034-1 & IEC 61034-2
Flame Retardancy : IEC 60332-1
Flame Propagation : IEC 60332-3-22 Cat. A
Mud Requirement : NEK TS 606
Mud Requirement : IEC 61892-4

Core Identification

1 Core : Green/ Yellow

Application : Fixed installation for power, control and lighting in both and safe areas, emergency and critical offshore , marine applications.