


Tel: 01467 633790  
E: sales@1st4cables.com  
W: www.1st4cables.com



DESIGN -	NOMINAL DIAM. (mm)
24 AWG Solid Copper Conductor	
PE Insulated (0.254mm RT)	
2 Cores Paired Up	
4 Pairs Laid Up, Taped	
LSZH Bedded	4.80
Galvanised Steel Wire Braided	5.80
LSZH Sheathed (Black, 1.2mm RT)	8.20

**Standards**  
EIA/TIA 568A;  
ISO/IEC 11801 2nd ed.; IEC 61156-5  
EN 50173; EN 50288-3-1  
**Fire Performance**  
IEC 60332-3-22 (Cat. A); IEC 60754-2; IEC 61034

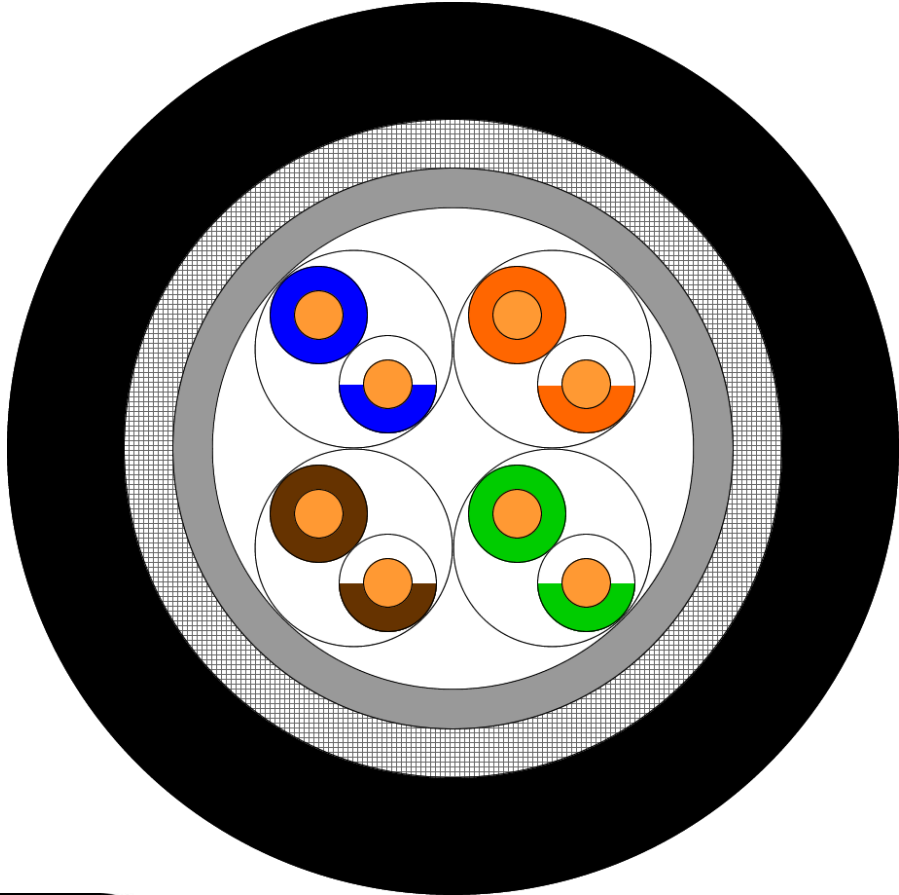

**CABLE DESCRIPTION –**  
**Steel Wire Braid Protected  
LSZH Category 5e UTP**

Designed By:  30/09/15 Approved By: 30/09/15

ISSUE No: 2 SCALE: Not to scale